

# PT-2992E USB Pedometer & Pedometer 2009 software Specification

## \*BASIC OPERATION OF BUTTON:


MODE/▼:Scrolls through various modes of the pedometer and DOWN

CLEAR/▲:Clear intraday counting and UP

SET:Enter setting for TIME/DATE/STRIDE/WEIGHT

RECORD:Check the anterior 7 days counting/Kcal./distance records

USB port:Connect to PC

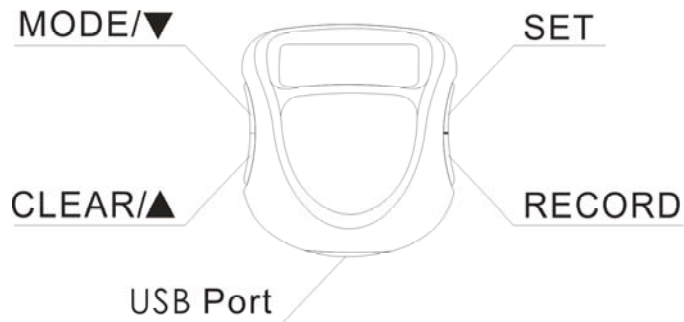

## \*HOW TO SETUP DATE

Time mode:LCD display A 12:00,press and hold SET for 3 minute to enter adjust mode.Hour '12' will flash and press CLEAR/▲ to increase press MODE/▼ to decrease the digits.Hold the button for fast increase or decrease,press SET to confirm and to Minute setting.

## \*SETTING SEQUENCE:

HOUR<MINUTE<12/24Hr<YEAR<MONTH<DAY

After 30 minute didn't operated,pedometer will exit setting automatic.



## \*HOW TO SET STRIDE & WEIGHT

### 1.HOW TO SET STRIDE:

Under distance mode:LCD display 'Km' press and hold SET for 3 minute to enter adjust mode. Stride 'CM 00'

will flash and press CLEAR/▲ to increase press MODE/▼ to decrease the digits.Hold the button for fast

increase or decrease,press SET to confirm and to Minute setting.

Stride range:30~150cm



### 2.HOW TO SET WEIGHT:

Under Kcal. mode:LCD display 'KCAL' press and hold SET for 3 minute to enter adjust mode. WEIGHT 'KG

00' will flash and press CLEAR/▲ to increase press MODE/▼ to decrease the digits.Hold the

button for fast increase or decrease, press SET to confirm and to Minute setting.

Weight range:20~150kg



### \*HOW TO CHECK INTRADAY DATA


- 1.Press MODE key,LCD display intraday data.SEQUENCE is TIME<STEP<DISTANCE<KCAL.
- 2.Intraday(Before 23:59) data can be cleared by press 'CLEAR/▲'button.
- 3.Intraday records will be reset and kept in EEPROM automatically at midnight(00:00) so it's ready to go every morning



### \*HOW TO CHECK THE ANTERIOR 7 DAYS RECORD

- 1.CHECK STEP RECORD:

STEP MODE:LCD display "STEP" enter RECORD/SET LCD display "daysbeforeSTEP"



- 2.CHECK DISTANCE RECORD: Under intraday display,press MODE/▼ to show KM then press RECORD/SET to check daysbefore KM,after 50 minute didn't operated pedometer will turn back to intraday display.




- 3.CHECK KCAL. RECORD:Under intraday display,press MODE/▼ to show KCAL then press RECORD/SET to check daysbefore KCAL,after 50 minute didn't operated pedometer will turn back to intraday display.




### \*HOW TO WEAR YOUR PEDOMETER

Clip pedometer on your strap,keep it 90 degree positions and should be perpendicular to the ground



## **\*HOW TO REPLACE BATTERY**

Open the battery compartment & pull out the battery. Remove the exhausted battery and replace with fresh. Make sure the polarity is correct and close the battery door.

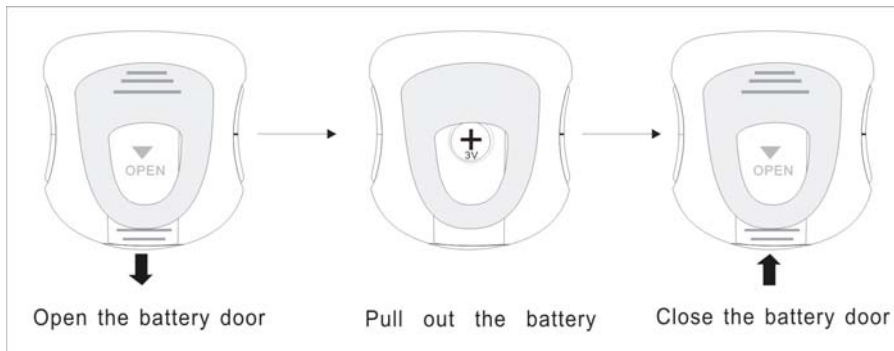

1PC CR2032 3V

## **\*CARE OF THE PEDOMETER**

- Avoid exposing the step counter to extreme temperatures.
- To clean the step counter use a dry soft cloth or a soft cloth moistened in a solution of water and a mild neutral detergent..Never use volatile agents such as benzene.thinner,spray cleaners.etc..
- Store your step counter in a dry place when not in use.
- Keep this manual and any other documentation that comes with the step counter in a safe place for future reference.

## **\*HOW TO CONNECT TO PC**


Install "Pedometer2009"on your computer before use

### **1.SETUP "PEDOMETER 2009"**

- Open CD and click Setup.exe to set up software.
- Language choose:For English or Chinese
- Select setup desination
- Finished
- Login

### **2.CREATE A NEW USER**

-Pedometer will have an exclusive ID(Build by Factory).Connect pedometer into PC by cable.Pedometer display PC and computer can identify new user is connecting with PC.

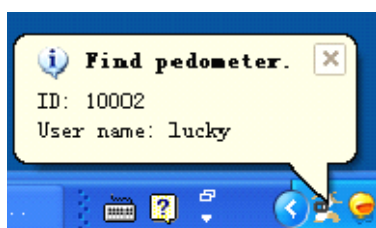

-Full filled CREATE NEW USER'S DATE(Example:USER NAME/GENDER/AGE/...etc.)and click "WRITE TO PEDOMETER"new user had be created successfully.

**Create new user** 

**Basic information**

ID:

User name:

Gender:  

Age:

Weight (Kgs):

Stature (cm):

Stride (cm):

☒ Write to pedometer

**Security and rights**


Password:

Confirm password:

Rights:  

-Check and revise user data.


Click USER DATE

**Basic information** 

**Basic information**

ID:

User name:

Gender:  

Age:

Weight (Kg):

Stature (cm):

Stride (cm):

☐ Write to pedometer



### 3.USER HOW TO ENTER INTERFACE

-Click this software and choose “MORE” then enter your name and your password to click LOGIN to enter.

-If this user had been created byore when PEDOMETER connected to PC it will identify automatically and you can click ‘ENTER SYSTEM’ to enter.

### 4.HOW TO EXPORT NEW DATA


-Basic on 3. click“USB” , and choose ‘EXPORT NEW DATA’,After exported close this window to check data at main interface

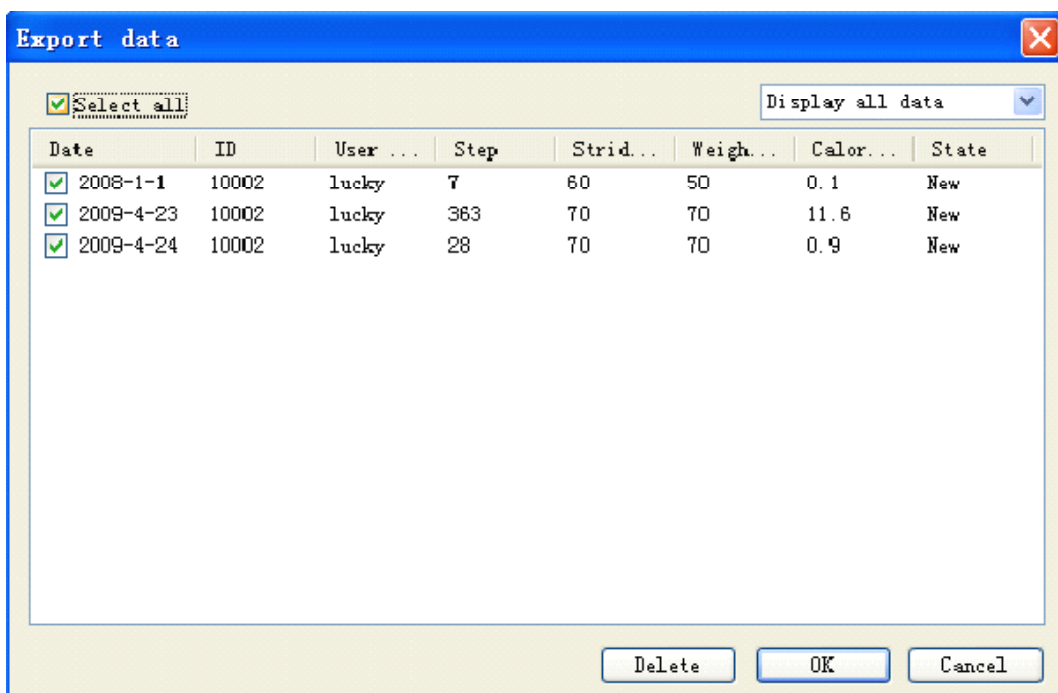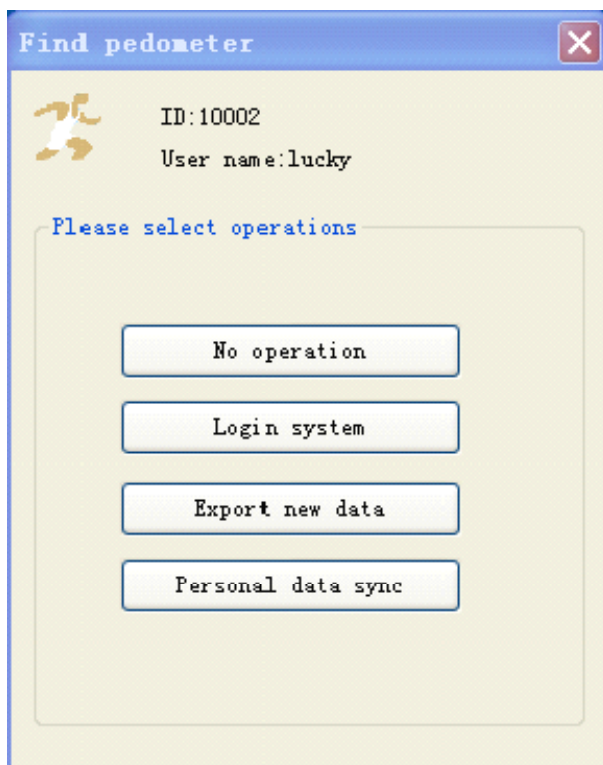

-Can update/in-phase personal data with same date between computer and pedometer(Synchronous personal data)

Example: You have adjust stride and your weight at computer/pedometer(or found there is difference data between pedometer

with computer) so that you can [Synchronous update this data to pedometer by this software.](#)

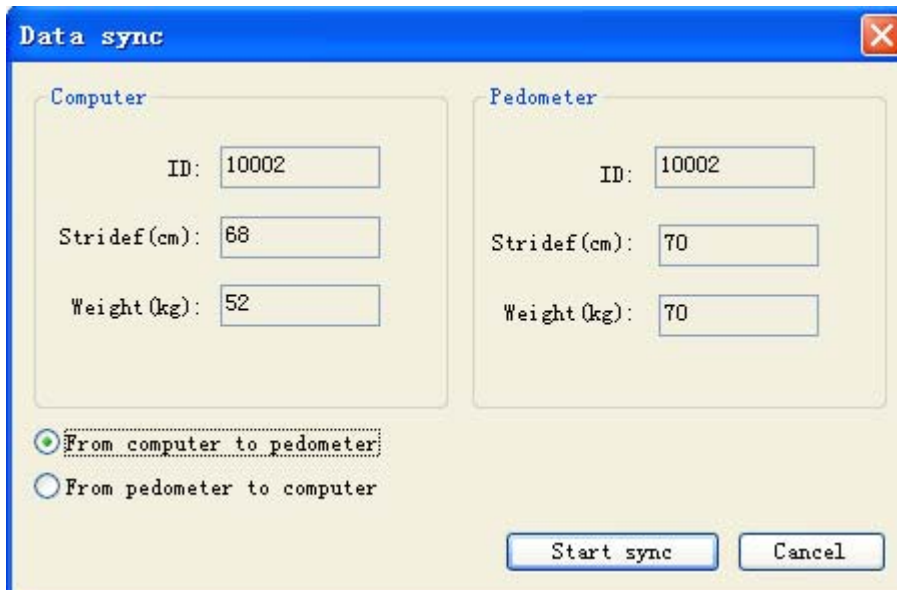


The 'Data sync' dialog box is used to synchronize data between a computer and a pedometer. It features two columns: 'Computer' and 'Pedometer'. Each column contains input fields for 'ID', 'Stride(cm)', and 'Weight(kg)'. Below these fields are two radio buttons: 'From computer to pedometer' (selected) and 'From pedometer to computer'. At the bottom right are 'Start sync' and 'Cancel' buttons.

Field	Computer	Pedometer
ID	10002	10002
Stride(cm)	68	70
Weight(kg)	52	70


## 5.ADMIN HOW TO ENTER INTERFACE

Users with administrator's authority could manage users

-Click this software and choose "ADMIN". The password default '123456' click LOGIN to enter.



The 'Pedometer2008' Admin Interface shows a login screen. On the left is an illustration of a laptop connected to a pedometer via a USB cable, with the text 'USB PEDOMETER'. On the right, there are two user entries: 'Admin' with the username 'ADMIN.' and a password field containing '\*\*\*\*\*', and 'lucky' with a password field. A 'Login' button is next to the 'Admin' entry. At the bottom left is a 'Language:' dropdown menu set to 'English'. At the bottom right are 'More' and 'Exit' buttons.

-Click  to switch to user admin interface

-Administer can create new user/edit/delete user and also can check every user's data

-How to check other user data


Choose any one on the list and double click this user so that you can check this what he/she had finished..

-How to delete user

Choose any one you would like to delete click "Delete"

Notice: Delete and operate deleting users from the database and clear empty users' idea step data, and delete and operate

irrecoverably . So ask to use deleting the function carefully 

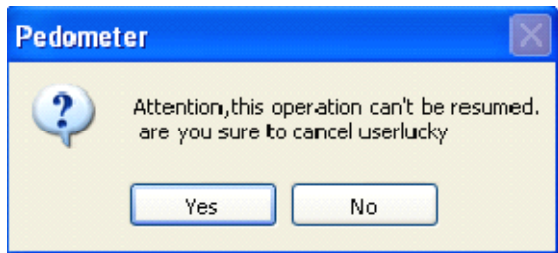

-How to search user.


Enter a keyword at the top of 'combo box' click 'Search' to find this user.


Previous page/Next page to easy find if it had large member in data-base

lu	<	Search	Edit	Add	Delete	Previous page	Next page
ID	User name	Gender	Age	Weight...	Stride...	Rights	
10002	lucky	Female	22	52	68	Normal user	

## 6.HOW TO CHECK/PRINTED DATA

-Admin can check all of member's data,click  can check yourself's data.

-If need to check other user's data click  at left and double click to check.  
check.

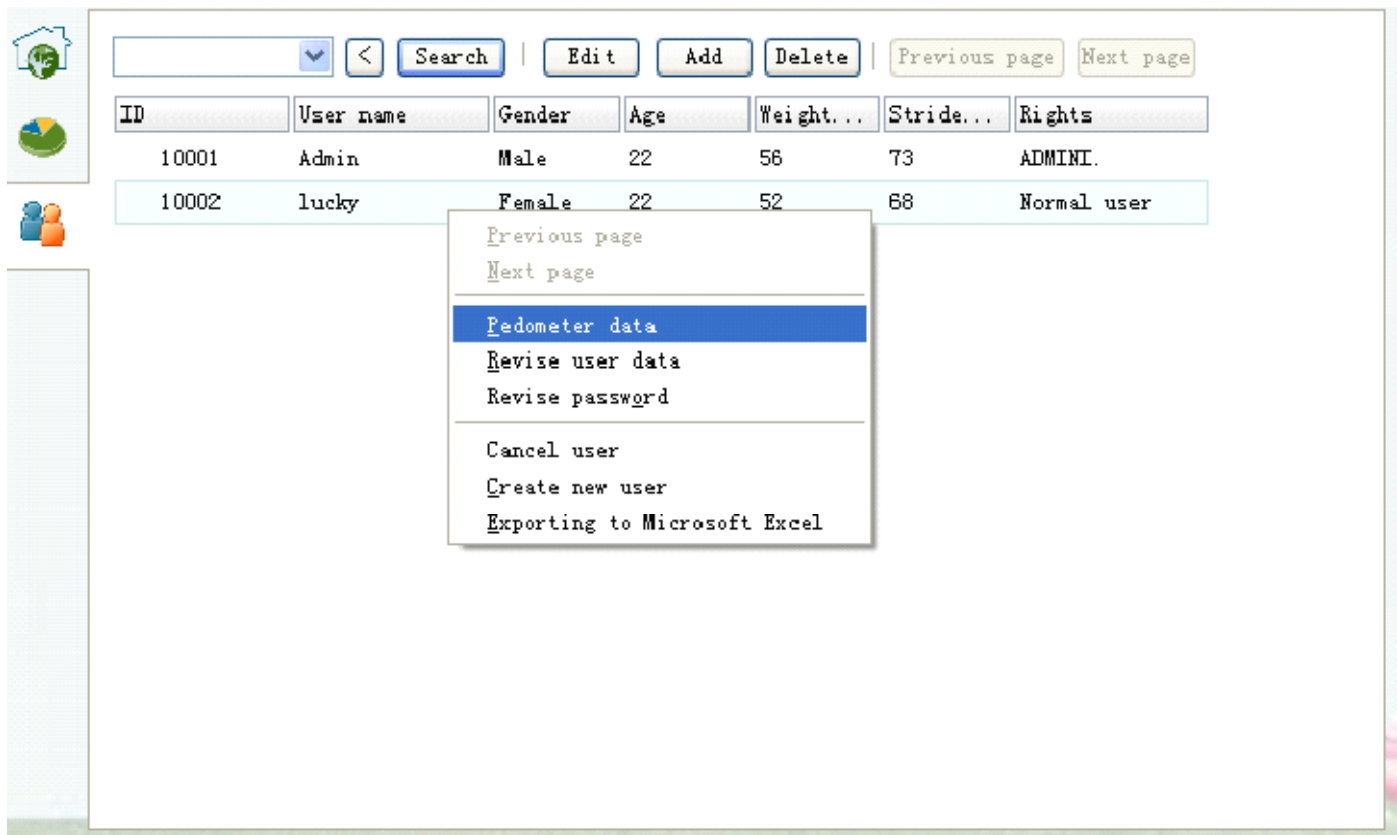The main application window shows a sidebar with icons for home, data, and users. The main area has a table of users and a search bar. A context menu is open over the 'lucky' user row, showing options like 'Pedometer data', 'Revise user data', 'Revise password', 'Cancel user', 'Create new user', and 'Exporting to Microsoft Excel'.

	<	Search	Edit	Add	Delete	Previous page	Next page
ID	User name	Gender	Age	Weight...	Stride...	Rights	
10001	Admin	Male	22	56	73	ADMINI.	
10002	lucky	Female	22	52	68	Normal user	

Previous page

Next page

**Pedometer data**


Revise user data

Revise password

Cancel user

Create new user

Exporting to Microsoft Excel

-Printed data click  打印 print button to printed data.Can choose black&white or colorful printed.


Printing setting

Printing setting

☒ White and black printing
 ☐ Color printing

OK

Cancel

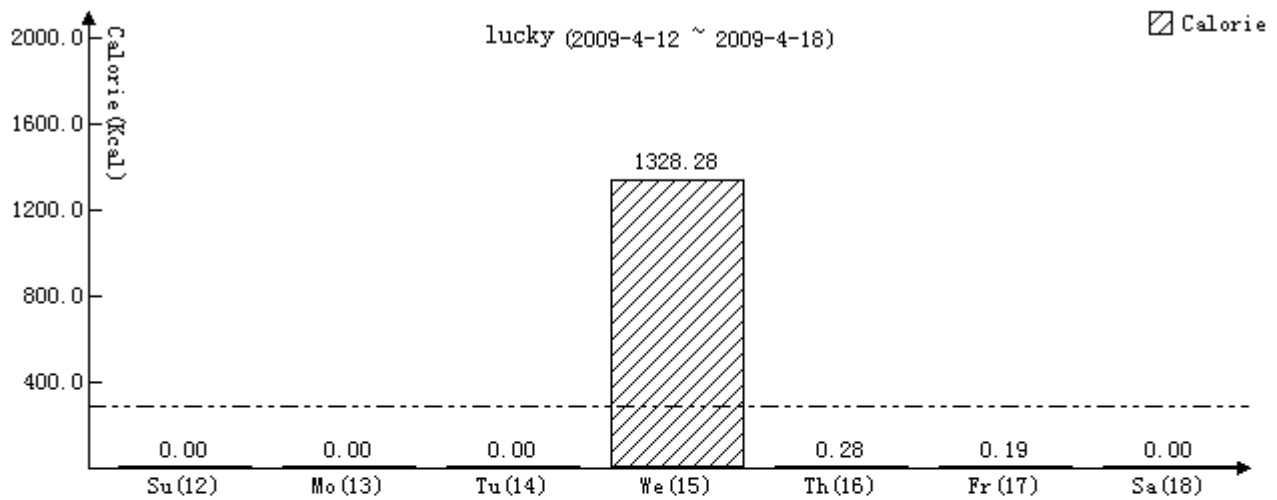

Date	Step	Distance[km]	Calorie(kcal)	Goal [step/km/kcal]	Finishin...
Su(12)	0	0.0	0.0	10000/8.0/293	0%
Mo(13)	0	0.0	0.0	10000/8.0/293	0%
Tu(14)	0	0.0	0.0	10000/8.0/293	0%
We(15)	31783	25.4	1328.3	10000/8.0/293	317%
Th(16)	13	0.0	0.3	10000/8.0/293	0%
Fr(17)	9	0.0	0.2	10000/8.0/293	0%
Sa(18)	0	0.0	0.0	10000/8.0/293	0%